


The 1:1 Broad Band Isolation Transformer MW>10m

Mod # ISO-IND-WB

This transformer provides Galvanic isolation with a separate winding for the primary and secondary sides of the transformer. It breaks or eliminates ground loops and the noise associated with them such as hum from the AC mains. It will also convert an un-balanced signal to a balanced signal. Low insertion loss(0.2%) with an SWR of 1.1:1 or less from 500 kHz to 32,000 kHz.

- SO239(accepts PL259) Cable Connector Gold+Silver Plated with Teflon® insulator.
- Internal Transmission line with Teflon® insulated conductors for low loss.
- 50 Ohm Impedance In/Out.
- ABS Plastic Enclosure.
- Wall Mountable.

Separate 10-32 Ground Studs tied to each SO239 Connector independently.

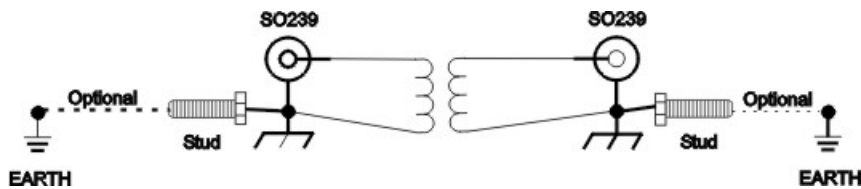

Compact (3" W x 1.25" H x 2.5" D) Mtg Holes 2.5" OC 0.186 dia

Receive only--not for transmitting and indoor use only unless mounted in a Waterproof enclosure.

****Important****

This product is Uni-Directional and for best performance please connect the connector Marked Receiver to the Receiver, and Marked Antenna to the Antenna connector.